
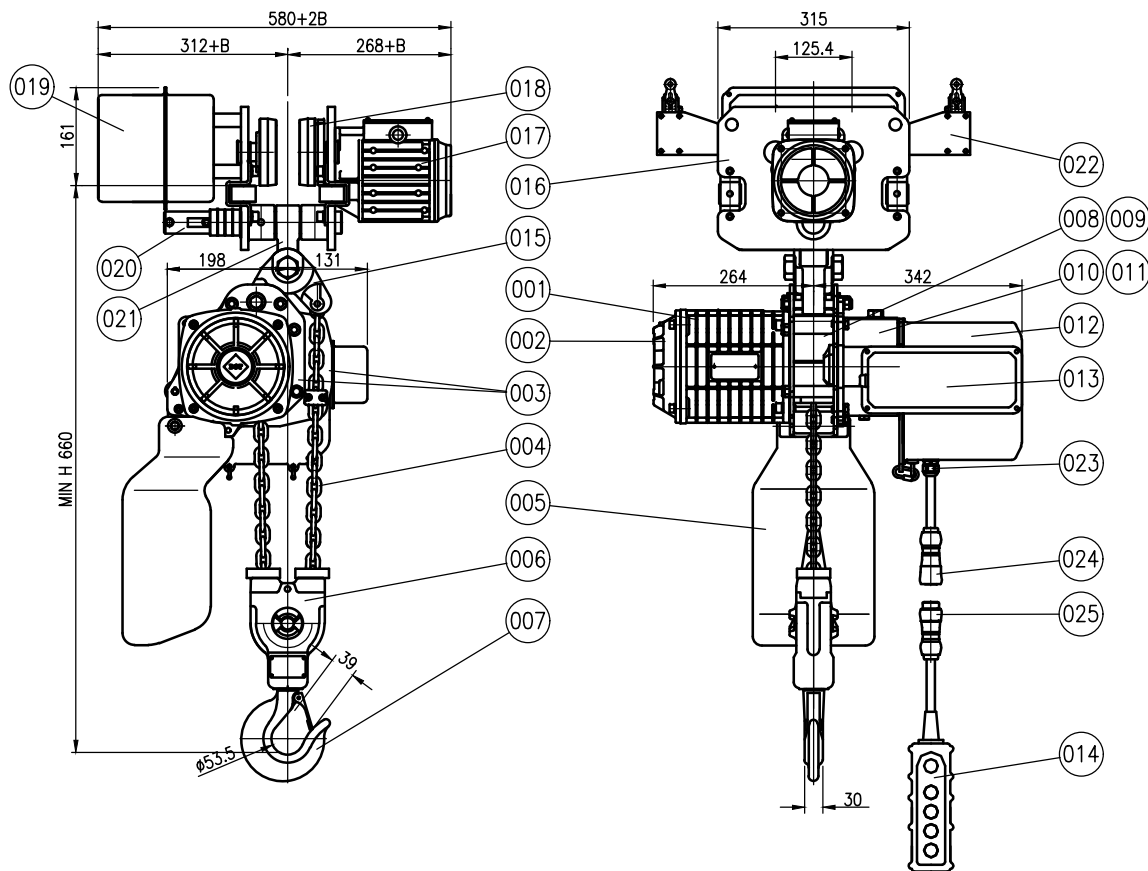


				NO	DESCRIPTION	MAT'L	REMARKS
014	PENDANT & CABLE ASS'Y	--		001	MOTOR CASE(크로메이트)	ALDC12.1	
015	ARM ASS'Y	SUS304		002	BRAKE COVER	SUS304	
016	GEAR&PLAIN SIDE PLATE	SUS304		003	GEAR&MOTOR SIDE PLATE	SUS304	
017	MOTOR CASE(크로메이트)	ALDC12.1		004	LOAD CHAIN(무전해 니켈도금)	Mn-B STEEL	ø7.1x21
018	GEAR & PLAIN ROLLER	SUS440A	ø110	005	CHAIN CONTAINER ASS'Y	PP+SUS304	CCA301
019	CONTROL BOX & COVER	SUS304		006	BOTTOM HOOK COVER	SUS304	
020	SHAFT	SUS304		007	BOTTOM HOOK	SUS304	
021	CONNECTOR	SUS304		008	CHAIN GUIDE	SUS304	
022	LIMIT SWITCH	--	OPTION	009	LOAD SHEAVE(무전해 니켈도금)	GCD450	
023	CABLE GLAND	--		010	GEAR CASE	SUS304	
024	FEMALE CABLE CONNECTOR	--		011	GEAR OIL & CHAIN OIL	--	FOOD GRADE
025	MALE CABLE CONNECTOR	--		012	CONTROL BOX COVER	SUS304	
				013	BRAKING RESISTOR COVER	SUS304	



SPECIFICATION			
HOISTING LOAD	2		TON
TESTING LOAD	2.5		TON
LIFT HEIGHT	4		M
PENDANT CABLE	3.5		M
HOISTING	SPEED	1.3 - 4.1	M/MIN
	MOTOR	1.8KW x 4P	1SET
TRAVERSING	SPEED	5.2-15.2 7.8-22.8	M/MIN
	MOTOR	0.4KW x 6P or 4P	1SET
POWER SUPPLY	AC 220V x 1ø x 60Hz		
OPERATING METHOD	P.B type ON . FL		
WEIGHT	124.0		KG
I-BEAM SIZE	100-150		MM
MINIMUM TURNING RADIUS	800		MM
ADD. LOAD CHAIN	2.2		KG/M
ADD. PENDANT CABLE	0.28		KG/M

TITLE				EDSSFNM-2W CHAIN HOIST		PROJECTION	
WORK NO		WORK NAME					
		OUTLINE DWG (MAX. LIFT 6M)				SCALE	Q'TY
						1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO			
H.J	—	LEE	Y.K	EDSSFNM2W301			
2022.06.27	—	2022.06.27	2022.06.27				
DAESAN INoTEC INC							

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED