
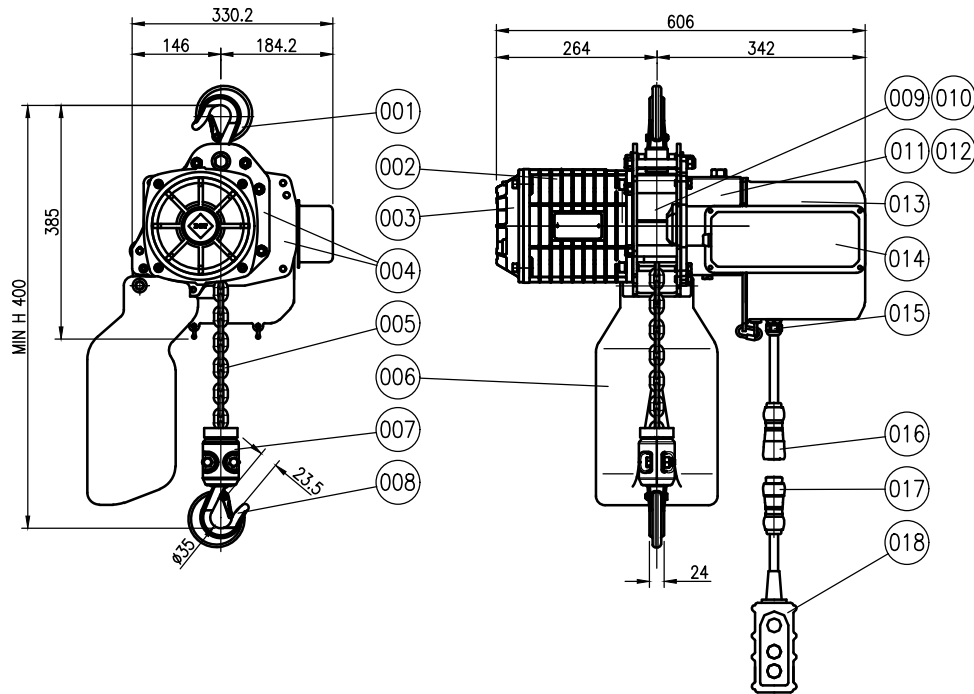




NO	DESCRIPTION	MAT'L	Q'TY	WT(kg)	REMARKS
001	TOP HOOK	SUS304			
002	MOTOR CASE (크로메이트)	ALDC12.1			
003	BRAKE COVER	SUS304			
004	GEAR&MOTOR SIDE PLATE	SUS304			
005	LOAD CHAIN	SUS316L			$\phi 7.1 \times 21$
006	CHAIN CONTAINER ASS'Y	PP+SUS304			CCA301
007	BOTTOM HOOK COVER	SUS304			
008	BOTTOM HOOK	SUS304			
009	LOAD SHEAVE (무전해 니켈도금)	GCD450			
010	CHAIN GUIDE	SUS304			
011	GEAR CASE	SUS304			
012	GEAR OIL & CHAIN OIL	NA			FOOD GRADE
013	CONTROL BOX COVER	SUS304			
014	BRAKING RESISTOR COVER	SUS304			
015	CABLE GLAND	NA			
016	FEMALE CABLE CONNECTOR	NA			
017	MALE CABLE CONNECTOR	NA			
018	PENDANT & CABLE ASS'Y	NA			

SPECIFICATION			
HOISTING LOAD	0.5	TON	
TESTING LOAD	0.625	TON	
LIFT HEIGHT	4	M	
PENDANT CABLE	3.5	M	
HOISTING	SPEED	2.7 / 8.2	M/MIN
	MOTOR	1.8 KW x 4P	1SET
POWER SUPPLY	AC 220,380,440,460,480V x 3 ϕ x 60Hz		
OPERATING METHOD	P.B type ON . FL		
WEIGHT	63.0	KG	
ADD. LOAD CHAIN	1.1	KG/M	
ADD. PENDANT CABLE	0.2	KG/M	

TITLE EDSTFS—0.5S CHAIN HOIST				PROJECTION	
					
WORK NO		WORK NAME			
				SCALE	Q'TY
		OUTLINE DWG (MAX. LIFT 12M)		1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO	
LIM.C.J	—	LEE	Y. K	EDSTFN05S301	
2026.03.13	—	2026.03.13	2026.03.13		
DAESAN INoTEC INC					

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED